

AT200 TOW | 316 SS | IP55



Features & Benefits

AT200 TOW | 316 SS | IP55



AT200 TOW | 316 SS | IP55

Stainless

The AT200 TOW SS is perfect for safely towing loads up to 2,000 kg.

Battery



- Interchangeable
- Maintenance-free
- Battery monitoring system

Strong



- FEA tested stainless steel chassis
- Impact resistant headset
- Zinc coated steel couplings

Powerful



- Optional switchable steering mode
- Up to 2,000 kg load capacity
- 0.8kW drive motor

Safety



- Anti-crush button
- Automatic tiller cut off
- Emergency stop button

Traction



- Internal weight packs
- Optimised size, puncture-proof wheel
- Controlled start acceleration

Technical data

Stainless AT200 TOW | 316 SS | IP55

Identification

Recommended load weight- Castors	2000 kg
Recommended load weight- Rails	8000 kg
Machine weight including battery	397 kg
Drive type	Electric DC
Drive motor power	0.8 kW
Drive wheel type	Non-marking, puncture proof rubber
Parking brake	Eletromagnetic
Operating voltage	24
Braking	Regenerative
Castor wheel type	Polyurethane
Controller type	DC
Hare mode speed	3.6 km/h
Tortoise mode speed	1.5 km/h
Variable machine speed	0.1 km/h - 5 km/h
Metal work finish	Stainless Steel 316 grade, 240-grit abr
IP rating for the machine	IP55
Operating temperature range	-15 to 40 °C
Operating environment	Inside

Battery options

Battery pack - sealed - 73Ah 24V - interchangeable - 316 SS
Battery pack - lithium - 79Ah 24V - fixed - 316 SS
Carrier, connectors and cables - no battery - 316 SS

Charging option

Charger - external - 15A 24V - 85V-265V
Charger - internal - 15A 24V - 110V-240V - 316 SS
Charger - lithium - external - 40A 24V - 85-265V - IP30

Optional extras

Option - flashing safety light and motion bleeper - 316 SS
Option - machine crawl coupling assist - 316 SS
Option - steer mode switch - 316 SS
Option - fifth wheel - 316 SS
Option - wireless control handset - 316 SS
Option - two speed selector switch
Option - battery protection system

Coupling options

Stainless AT200 TOW | 316 SS | IP55


Z79-00600

Coupling - male - pin - 316 SS




Z79-00602

Coupling - male - adjustable towing arm - 316 SS

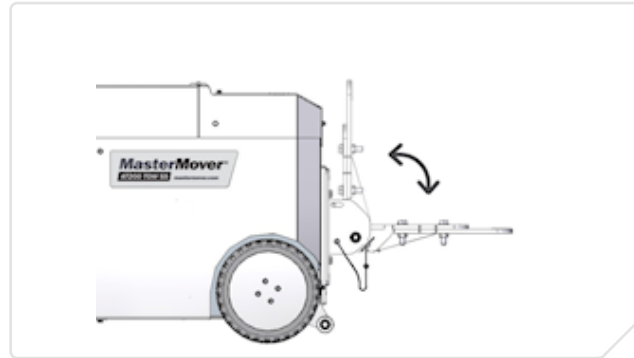

Z79-00603

Coupling - male - height adjustable box - small - 31...

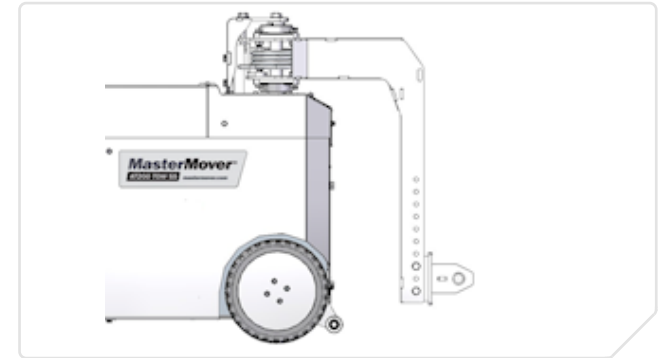

Z79-00700

Coupling - female - height adjustable box - small - 3...



Machine options

Stainless

Z71-00500

Option - flashing safety light and motion bleeper



Z71-00502

Option - two speed selector switch



Find out more

Contact us today to find out which electric tug from MasterMover can help to improve efficiency and safety in your workplace.

For sales and support please contact:

Mastermover Ltd
Airfield Industrial Estate, Moor Farm Road
Ashbourne, DE6 1HD, England

T 01335 301 030
E sales@mastermover.com
W www.mastermover.com