



# Features & Benefits

## AT300 TOW | 316 SS | IP55



AT300 TOW | 316 SS | IP55

### Stainless

The AT300 TOW SS is perfect for safely towing loads up to 3,000 kg.

#### Battery



- Interchangeable
- Maintenance-free
- Battery monitoring system

#### Strong



- FEA tested stainless steel chassis
- Impact resistant headset
- Zinc coated steel couplings

#### Powerful



- Optional switchable steering mode
- Up to 3,000 kg load capacity
- 0.8kW drive motor

#### Safety



- Anti-crush button
- Automatic tiller cut off
- Emergency stop button

#### Traction



- Internal weight packs
- Optimised size, puncture-proof wheels
- Controlled start acceleration

# Technical data

## Stainless AT300 TOW | 316 SS | IP55

### Identification

Recommended load weight- Castors	3000 kg
Recommended load weight- Rails	12000 kg
Machine weight including battery	397 kg
Drive type	Electric DC
Drive motor power	0.8 kW
Drive wheel type	Non-marking, puncture proof rubber
Parking brake	Eletromagnetic
Operating voltage	24
Braking	Regenerative
Castor wheel type	Polyurethane
Controller type	DC
Hare mode speed	3.6 km/h
Tortoise mode speed	1.5 km/h
Variable machine speed	0.1 km/h - 5 km/h
Noise level	≤80 dBA
Metal work finish	Stainless Steel 316 grade, 240-grit abr
IP rating for the machine	IP55
Operating temperature range	-10 to 40°C
Operating environment	Inside

### Battery options

Battery pack - sealed - 73Ah 24V - interchangeable - 316 SS
Battery pack - lithium - 79Ah 24V - fixed - 316 SS
Carrier, connectors and cables - no battery - 316 SS

### Charging option

Charger - external - 15A 24V - 85V-265V
Charger - internal - 15A 24V - 110V-240V - 316 SS
Charger - lithium - external - 40A 24V - 85-265V - IP30

### Optional extras


Option - flashing safety light and motion bleeper - 316 SS
Option - machine crawl coupling assist - 316 SS
Option - steer mode switch - 316 SS
Option - fifth wheel - 316 SS
Option - wireless control handset - 316 SS
Option - two speed selector switch
Option - battery protection system

# Coupling options

**Stainless AT300 TOW | 316 SS | IP55**


Z79-00600

Coupling - male - pin - 316 SS

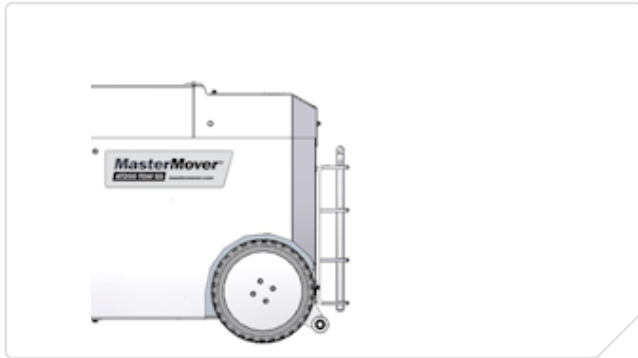


Z79-00602

Coupling - male - adjustable towing arm - 316 SS

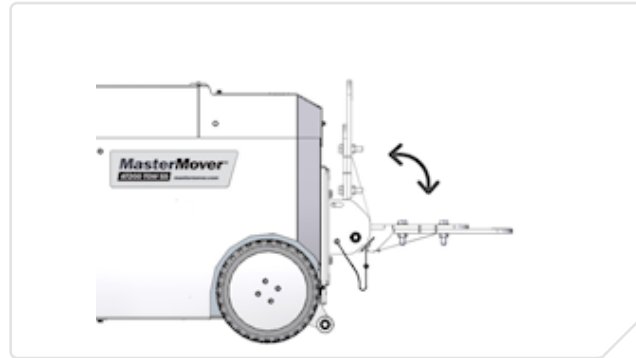

Z79-00603

Coupling - male - height adjustable box - small - 31...

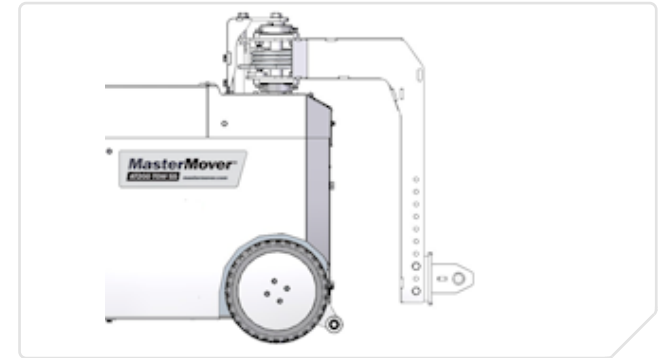

Z79-00700

Coupling - female - height adjustable box - small - 3...



# Machine options

## Stainless

Z71-00500

Option - flashing safety light and motion bleeper



Z71-00502

Option - two speed selector switch



# *Find out* **more**

Contact us today to find out which electric tug from MasterMover can help to improve efficiency and safety in your workplace.

For sales and support please contact:

**Mastermover Ltd**  
Airfield Industrial Estate, Moor Farm Road  
Ashbourne, DE6 1HD, England

T 01335 301 030  
E [sales@mastermover.com](mailto:sales@mastermover.com)  
W [www.mastermover.com](http://www.mastermover.com)